

07-13-00

A

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

ATTY DOCKET NO.: 5577-204

DATE: July 12, 2000

# UTILITY PATENT APPLICATION TRANSMITTAL LETTER AND FEE TRANSMITTAL FORM (37 CFR 1.53(b))

 jc808 U.S. PTO  
09/614983  
07/12/00

## BOX PATENT APPLICATION

 Commissioner for Patents  
Washington, DC 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is:

- ☒ a patent application  
☐ a Continuation ☐ a Divisional ☐ a Continuation-in-Part (CIP)  
 of prior application no.: ; filed  
☐ A Small Entity Statement(s) was filed in the prior application; Status still proper and desired.

## Inventor(s) or Application Identifier:

**John R. Hind**, Raleigh, North Carolina; **Marcia Lambert Peters**, Durham, North Carolina  
 Entitled: **METHODS, SYSTEMS AND COMPUTER PROGRAM PRODUCTS FOR RULE  
BASED FIRMWARE UPDATES UTILIZING CERTIFICATE EXTENSIONS**

## Enclosed are:

1. ☒ Application Transmittal Letter and Fee Transmittal Form (*A duplicate is enclosed for fee processing*)
2. ☒ 69 pages of Specification (including 74 claims)
3. ☒ 12 sheets of Formal Drawings (35 USC 113)
4. ☒ Oath or Declaration
  - a. ☒ newly executed (*original or copy*)
  - b. ☐ copy from prior application (37 CFR 1.63(d) (*for continuation/divisional*) [Note Box 5 Below]
  - c. ☐ DELETION OF INVENTOR(S) (*Signed statement deleting inventor(s) named in the prior application*)
5. ☐ Incorporation By Reference (*useable if box 4b is checked*)  
 The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (*Appendix*)
7. ☒ Assignment papers (*cover sheet(s) and document(s)*)
8. ☐ Small Entity Statement(s)
9. ☐ Information Disclosure Statement, PTO-1449, and \_\_ references cited
10. ☒ Preliminary Amendment (***Please enter all claim amendments prior to calculating the filing fee.***)
11. ☐ English Translation Document
12. ☐ Certified Copy of Application No. ; Filed

 jc846 U.S. PTO  
07/12/00

09/614983 07/12/00

In re: Hind, et al.  
Filed: July 12, 2000  
Attorney Docket No. 5577-204

13. ☐ Sequence Listing/ Sequence Listing Diskette  
a. ☐ computer readable copy  
b. ☐ paper copy  
c. ☐ statement in support  
14. ☐ An Associate Power of Attorney  
15. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)  
16. ☐ Other:

The fee has been calculated as shown below:

	Column 1 No. Filed	Column 2 No. Extra	Small Entity Rate Fee	Large Entity Rate Fee
BASIC FEE			\$345.00	\$690.00
TOTAL CLAIMS	74- 20 =	54	x 9 = \$	x 18 = \$ 972.00
INDEP CLAIMS	6 - 3 =	3	x 39 = \$	x 78 = \$ 234.00
<input type="checkbox"/> MULTIPLE Dependent Claims Presented			+ 130 = \$	+ 260 = \$
If the difference in Col. 1 is less than zero, Enter "0" in Col. 2			Total \$	Total \$1896.00

- ☐ A check in the amount of \$ \_\_\_\_\_ to cover the filing fee is enclosed.  
☐ A check in the amount of \$ \_\_\_\_\_ is enclosed to cover the filing fee, PLUS the Assignment Recordation fee (\$40.00).  
☒ Please charge my Deposit Account No. 09-0461 in the amount of \$1936.00 to cover the filing fee, PLUS the Assignment Recordation fee (\$40.00).  
☐ Please charge my Deposit Account No. 09-0461 in the amount of \$ \_\_\_\_\_ to cover the filing fee.  
☐ The Commissioner is hereby authorized to credit overpayments or charge the following fees associated with this communication to Deposit Account No. 09-0461.  
a. ☐ Additional filing fees under 37 CFR 1.16 for presentation of extra claims.  
b. ☐ Additional patent application processing fees under 37 CFR 1.17.

Respectfully submitted,




Timothy J. O'Sullivan  
Registration No. 35,632

USPTO Customer No. 20792  
Myers Bigel Sibley & Sajovec  
Post Office Box 37428  
Raleigh, North Carolina 27627  
Telephone (919) 854-1400  
Facsimile (919) 854-1401

**CERTIFICATE OF EXPRESS MAILING**

Express Mail Label No. EL481791078US  
Date of Deposit: July 12, 2000

I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Box Patent Application, Commissioner For Patents, Washington, DC 20231.

  
Vickie Diane Prior

Date of Signature: July 12, 2000

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re: John R. Hind and Marcia Lambert Peters  
 Serial No. To Be Assigned  
 Filed: Concurrently Herewith  
 For: **METHODS, SYSTEMS AND COMPUTER PROGRAM  
 PRODUCTS FOR RULE BASED FIRMWARE UPDATES  
 UTILIZING CERTIFICATE EXTENSIONS**

July 12, 2000

BOX PATENT APPLICATION  
Commissioner for Patents  
Washington, DC 20231

## PRELIMINARY AMENDMENT

Sir:

**In the Title:**

Please amend the title by inserting the phrase --AND CERTIFICATES FOR USE THEREIN-- after the phrase "CERTIFIACTE EXTENSIONS".

**In the Claims:**

Please amend line 1 of Claim 68 by replacing the word "method" with --certificate--.

Respectfully submitted,

*[Signature]*

Timothy J. O'Sullivan  
Registration No. 35,632

USPTO Customer No. 20792  
Myers Bigel Sibley & Sajovec  
Post Office Box 37428  
Raleigh, North Carolina 27627  
Telephone (919) 854-1400  
Facsimile (919) 854-1401

## CERTIFICATE OF EXPRESS MAILING

Express Mail Label No. EL481791078US  
Date of Deposit: July 12, 2000

I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Box Patent Application, Commissioner For Patents, Washington, DC 20231.

Vickie Diane Prior  
Vickie Diane Prior  
Date of Signature: July 12, 2000

METHODS, SYSTEMS AND COMPUTER PROGRAM PRODUCTS FOR  
RULE BASED FIRMWARE UPDATES UTILIZING CERTIFICATE  
EXTENSIONS

Related Applications

The present application is related to commonly  
assigned and concurrently filed United States Patent  
Application Serial No. \_\_\_\_\_, entitled "METHODS,  
5 SYSTEMS AND COMPUTER PROGRAM PRODUCTS FOR SECURE  
FIRMWARE UPDATES", Attorney Docket Number 5577-199, the  
disclosure of which is incorporated by reference as if  
set forth fully herein.

Field of the Invention

The present invention relates to data processing  
systems and more particularly to data processing  
systems having programmable memories.

Background of the Invention

Many devices today make use of computational  
elements controlled by software instructions embedded  
in the device to give the device its functional

personality. This software, often called firmware because of its persistent association with the device hardware operation, was historically placed in read-only memory (ROM) and was activated when the device was powered on. With time, it was recognized that firmware, like other forms of software, was subject to coding mistakes and that over the lifetime of the device there might be a need to modify the functional characteristics of the device, for example, to adapt it to a new target environment. This need to repair firmware coding errors and/or modify firmware functionality led to the use of field-programable random-access memory (RAM) as a repository for on-device firmware. This provided an easier means of modification than replacing ROM chips.

As a result of this evolution, typically, firmware can be updated without physical hardware modification, using removable digital media or a network connection as the mechanism by which new firmware is communicated to the device. The extensive increase in network connectivity in recent years has resulted in an increase in the number of firmware-driven devices that allow personality updates. With the increasing number of update capable devices may come significant security problems. With the ubiquitous nature of firmware-driven devices, such security problems may extend to homes, businesses and other areas where such devices are utilized. For example, personal computers, pagers, cell phones, satellite receivers, set-top boxes, cable and DSL modems, routers, digital TVs, or even

appliances like refrigerators, sewing machines, and ovens may all be susceptible to such security problems.

In a personal computer, firmware instructions are generally referred to as a Basic Input-Output System (BIOS). A BIOS typically contains hardware diagnostics, code which initializes and enables/disables certain hardware features (for example boot from network, system board sound or display capability, memory parity, I/O bus speed, DMA, etc.), and instructions enabling the operating system and application programs to interface with the computer hardware. Parameters governing branches through the initialization code to enable/disable or configure certain hardware features are often stored in battery-backed-up CMOS RAM. All of these instructions, typically, must be executed or instantiated as an application program interface (API) successfully in order for the computer to boot.

It is well known in the art that the hardware in which the firmware (e.g., PC BIOS) instructions reside may be a field-programmable ROM such as an electrically erasable programmable read only memory (EE-PROM) or a Flash RAM. Such hardware designs are desirable in allowing the manufacturer to update the firmware after manufacture, for example, to enable new capabilities or fix problems. However, storing the BIOS in a flash memory may also open new vulnerabilities that can be exploited by hackers. For example, some of the approximately 50,000 computer viruses known today -- such as the Chernobyl virus (known as CIH and W95.CIH) -- overwrite the BIOS with invalid instructions,

completely disabling the computer and requiring physical replacement of the BIOS chip.

However, security problems may extend beyond the malicious third parties attempting to damage devices in customers' hands. It is well known that many devices are built on generic hardware, where the sole difference between several models may be the sticker on the front panel, the firmware load in the resident flash, and the price. In such devices, a customer may, for example, change an inexpensive device into a more expensive device merely by updating the firmware. For example, a manufacturer of Compact Disk Read Write (CDRW) drive mechanisms recently began to receive service calls about its named brand \$300 6X-write-speed drives which turned out to be \$100 OEM 4X-write-speed drives with their named brand firmware update installed. Accordingly, manufacturers of devices that use easily updateable firmware may be faced with significant security problems that are complicated by situations where the device executes non-firmware application code, and/or the device owner is complicit in the hacking activity.

#### Summary of the Invention

Embodiments of the present invention include methods, systems, computer program products and business methods which provide updates of firmware (i.e. data stored in a programmable memory device of a processing system) based on rules provided as extensions to certificates associated with an update. Such updates may be provided by obtaining an update

image corresponding to the update of the programmable memory and obtaining a certificate associated with the update image, the certificate having update application rules in at least one extension of the certificate.

5 The certificate may be provided as part of the update image. The update application rules are extracted from the extension of the certificate and the programmable memory selectively updated based on the update image and the update application rules extracted from the  
10 obtained certificate.

In particular embodiments, the programmable memory may be updated with the update image if any of the update application rules indicate that the update image is applicable to the device. Alternatively, the  
15 programmable memory may be updated with the update image only if all of the update application rules indicate that the update image is applicable to the device.

In particular embodiments of the present  
20 invention, the update application rules may be rules information associated with a manufacturer of the device, rules information associated with a brand of the device, rules information associated with a software version of the device, rules information  
25 associated with a license authorization of the device and/or rules associated with the individual device. In still further embodiments, the update application rules may define devices for which application of the update image is authorized. In such embodiments, the rules  
30 defining devices may specify authorized device serial numbers, authorized firmware versions, authorized



device manufacturers and/or authorized users associated with a device.

In yet further embodiments of the present invention, the update application rules define how data from the update image is utilized to update the programmable memory. Thus, the update application rules may identify installation information provided with the update image and the programmable memory updated utilizing the installation information provided with the update image. Such installation information may, for example, be an install program. In such embodiments, the programmable memory would be updated utilizing the installation information by executing the install program to write the update data to the programmable memory.

In yet additional embodiments of the present invention, the authenticity of the update image may be verified. Such verification can be accomplished in various ways, for example by means of a shared secret, or by a public-key cryptosystem, or in other ways known to those with skill in the art. In certain embodiments, verification of the image may be accomplished by including and checking a digital signature comprising a hash of the image encrypted by the private key of an update authority. In addition to the signature, an X.509 certificate of the update authority may also be included with the distribution of the image. See CCITT Recommendation X.509, "The Directory-Authentication Framework", Consultation Committee, International Telephone and Telegraph, International Telecommunications Union, Geneva, 1989.

The verification of the signature may be provided by computing the hash over the image, decrypting the signature using the public key from the included certificate, and comparing the decrypted result with the computed hash value. If they are equal, the signature verification has succeeded. The control program then validates the update authority's certificate by validating a signature contained therein, the signature having been created by the certificate authority signing the update authority's certificate using the certificate authority's private key.

In a non-chained form, this validation may be provided by using a public key of the certificate authority that issued the update authority's certificate to decrypt the digital signature contained in the update authority's certificate and comparing it against a computed hash of the update authority's certificate. The certificate authority's public key used to perform this validation may be contained in the ROM image or in the current contents of the protected memory. In a more complex arrangement, the image would contain a chain of certificates that can be validated back to a certificate signed by the root certificate authority.

Thus, additional embodiments of the present invention may provide for verifying the authenticity of the update image. Such verification may be provided by evaluating the certificate associated with the update image to determine if a valid digital signature is provided with the image. This determination may be

made by decrypting the digital signature provided with the image using a shared secret.

In particular embodiments, a digital signature of the certificate is decrypted utilizing a public key of a certificate authority accessible to the update program. The decrypted digital signature is compared with a precomputed value to determine if the digital signature is a valid digital signature associated with the certificate authority.

In certain embodiments of the present invention, the public key is stored in a non-updateable memory. In other embodiments of the present invention, the public key of the certificate authority is provided in a previous version of data to be stored in the programmable memory.

In still further embodiments of the present invention, the update image includes a plurality of certificates in a hierarchy of certificates. Authenticity of the update image may be verified by evaluating each of the plurality of certificates in the update image to determine if a valid digital signature is provided with each certificate of the update image. Thus, a digital signature of a certificate may be decrypted utilizing a public key associated with a next-higher certificate in the hierarchy and compared a precomputed value to determine if the digital signature is a valid digital signature associated with the certificate. A public key associated with another of the digital certificates may be obtained and the decryption and comparison repeated until a last of the

digital certificates is obtained. The last public key may be compared with a predetermined value.

5 In still further embodiments of the present invention, where the update image includes a plurality of certificates in a hierarchy of certificates, the update application rules are extracted from certificate extensions of the certificates in the hierarchy of certificates. In such embodiments, the programmable memory may be updated with the update image only if all  
10 of the update application rules indicate that the update image is applicable to the device. Alternatively, the programmable memory may be updated with the update image if any of the update application rules indicate that the update image is applicable to  
15 the device.

Embodiments of the present invention may also provide a certificate for use in updating a programmable memory. Such certificate includes a digital signature and at least one extension having  
20 rules to control installation of an update image. The certificate may be signed with a private key of a certificate authority. Furthermore, the certificate may be a certificate in a hierarchy of a plurality of certificates. In such a case, the certificate may be  
25 signed with a private key of a next-higher authority associated with a next-higher certificate in the hierarchy of certificates. The rules may be rules for application of a firmware update as described above.

30 In still further embodiments of the present invention, a plurality of devices having differing functionality may be provided by providing a plurality

of generic processing devices having hardware suitable  
to perform at least a portion of the differing  
functionality of the plurality of devices, wherein the  
generic processing devices also have a programmable  
5 memory. Updates to the programmable memory are  
distributed to the plurality of devices so as to define  
the functionality of the generic processing devices so  
as to provide the plurality of devices having differing  
functionality. The updates have at least one  
10 associated certificate, the certificate having update  
application rules in at least one extension of the  
certificate. The programmable memories of the generic  
processing devices is selectively updated based on the  
distributed updates and the rules specified in the at  
15 least one extension of the certificate.

While the invention has been described above  
primarily with respect to method aspects of the  
invention, both systems and/or computer program  
products are also provided.

#### Brief Description of the Drawings

**Figure 1** is a block diagram of a firmware update  
system according to embodiments of the present  
invention;

**Figure 2** is a block diagram of a data processing  
system suitable for use with the present invention;

**Figure 3** is a more detailed block diagram of data  
processing systems according to embodiments of the  
present invention;

**Figure 4A** is a flowchart illustrating operations  
according to embodiments of the present invention;

**Figure 4B** is a flowchart illustrating operations according to further embodiments of the present invention;

5       **Figure 5** is a flowchart illustrating operations for performing a firmware update according to embodiments of the present invention;

10       **Figure 6** is a flowchart illustrating operations according to embodiments of the present invention utilizing cryptographic techniques to provide secure firmware updates;

**Figure 7** is a block diagram of a certificate structure according to embodiments of the present invention;

15       **Figure 8** is a flowchart illustrating operations for creating a firmware update according to embodiments of the present invention;

**Figure 9** is a flowchart illustrating operations for performing a firmware update utilizing a certificate structure such as described in **Figure 7**;

20       **Figure 10** is a block diagram of a firmware distribution system according to embodiments of the present invention; and

25       **Figure 11** is a flowchart illustrating operations according to further embodiments of the present invention which may provide for methods of doing business according to embodiments of the present invention.

#### Detailed Description of Preferred Embodiments

5 The present invention now will be described more  
fully hereinafter with reference to the accompanying  
drawings, in which preferred embodiments of the  
invention are shown. This invention may, however, be  
embodied in many different forms and should not be  
construed as limited to the embodiments set forth  
herein; rather, these embodiments are provided so that  
this disclosure will be thorough and complete, and will  
fully convey the scope of the invention to those  
10 skilled in the art.

As will be appreciated by one of skill in the art,  
the present invention may be embodied as a method, data  
processing system, or computer program product.  
Accordingly, the present invention may take the form of  
15 an entirely hardware embodiment, an entirely software  
embodiment or an embodiment combining software and  
hardware aspects. Furthermore, the present invention  
may take the form of a computer program product on a  
computer-usable storage medium having computer-usable  
20 program code means embodied in the medium. Any suitable  
computer readable medium may be utilized including hard  
disks, CD-ROMs, optical storage devices, or magnetic  
storage devices.

The computer-usable or computer-readable medium  
25 may be, for example but not limited to, an electronic,  
magnetic, optical, electromagnetic, infrared, or  
semiconductor system, apparatus, device, or propagation  
medium. More specific examples (a nonexhaustive list)  
of the computer-readable medium would include the  
30 following: an electrical connection having one or more  
wires, a portable computer diskette, a random access

memory (RAM), a read-only memory (ROM), an erasable programmable read-only memory (EPROM or Flash memory), an optical fiber, and a portable compact disc read-only memory (CD-ROM). Note that the computer-usable or  
5 computer-readable medium could even be paper or another suitable medium upon which the program is printed, as the program can be electronically captured, via, for instance, optical scanning of the paper or other medium, then compiled, interpreted or otherwise  
10 processed in a suitable manner if necessary, and then stored in a computer memory.

Computer program code for carrying out operations of the present invention may be written in an object oriented programming language such as Java®, Smalltalk  
15 or C++. However, the computer program code for carrying out operations of the present invention may also be written in conventional procedural programming languages, such as the "C" programming language or even assembly language. The program code may execute  
20 entirely on the user's computer, partly on the user's computer, as a stand-alone software package, partly on the user's computer and partly on a remote computer or entirely on the remote computer. In the latter scenario, the remote computer may be connected to the  
25 user's computer through a local area network (LAN) or a wide area network (WAN), or the connection may be made to an external computer (for example, through the Internet using an Internet Service Provider).

The present invention is described below with  
30 reference to flowchart illustrations and/or block diagrams of methods, apparatus (systems) and computer



program products according to embodiments of the invention. It will be understood that each block of the flowchart illustrations and/or block diagrams, and combinations of blocks in the flowchart illustrations and/or block diagrams, can be implemented by computer program instructions. These computer program instructions may be provided to a processor of a general purpose computer, special purpose computer, embedded processor or other programmable data processing apparatus to produce a machine, such that the instructions, which execute via the processor of the computer or other programmable data processing apparatus, create means for implementing the functions specified in the flowchart and/or block diagram block or blocks.

These computer program instructions may also be stored in a computer-readable memory that can direct a computer or other programmable data processing apparatus to function in a particular manner, such that the instructions stored in the computer-readable memory produce an article of manufacture including instruction means which implement the function specified in the flowchart and/or block diagram block or blocks.

The computer program instructions may also be loaded onto a computer or other programmable data processing apparatus to cause a series of operational steps to be performed on the computer or other programmable apparatus to produce a computer implemented process such that the instructions which execute on the computer or other programmable apparatus

provide steps for implementing the functions specified in the flowchart and/or block diagram block or blocks.

As is described in more detail below, embodiments of the present invention may provide selective firmware updates by providing rules as an extension or extensions of a certificate. Such rules may be incorporated into the certificates to selectively apply updates based on any suitable criteria and/or may be utilized to control how an update is applied.

Additional embodiments of the present invention may utilize cryptographic techniques to further increase the security of the firmware update. Various embodiments of the present invention will now be described with reference to **Figures 1** through **11**.

Referring now to **Figure 1**, a firmware update system according to embodiments of the present invention is illustrated. As is seen in **Figure 1**, a processor **10**, such as a general purpose microprocessor, a digital signal processor or a specific purpose processor has associated with it a latch **18** which defines a state of access permissions to a programmable memory **14** and/or a read only memory (ROM) **16**. Such access may be controlled by a memory controller **12** or other such device which allows the processor **10** to access the programmable memory **14** and the read only memory **16**.

In particular, the programmable memory **14** may be flash RAM or other programmable memory which may contain firmware, such as a BIOS program or other such firmware, which may provide the basic functionality of

the device incorporating the processor 10. The processor 10 may access the programmable memory 14 through the memory controller 12 to execute instructions stored in the programmable memory 14 or to update the contents of the programmable memory 14. The processor 10 may also access the ROM 16 to execute a firmware update program stored in the ROM 16.

In operation, the processor 10 receives a hardware reset signal, such as the power on reset signal illustrated in **Figure 1**, which causes the processor 10 to reset its registers and begin execution of a program from a predefined memory location. Thus, the latch 18 can be set into an initial state by a hardware reset, which is the means to return the processor 10 to a known non-debug state executing a specific instruction stream (e.g. the instruction stream stored in the ROM 16). In particular embodiments of the present invention, the predefined memory location corresponds to a memory location in the ROM 16. In addition to resetting the processor 10, the reset signal also sets the latch 18 to a state which instructs the memory controller 12 to allow access to the ROM 16 (i.e., read operations) and to allow updates (i.e. write operations) to the programmable memory 14. Thus, for example, when the "Q" of the latch 18 is a logical "1" the memory controller 12 may allow reads of the ROM 16 and writes to the programmable memory 14.

As is further illustrated in **Figure 1**, an output of the processor 10 may also be provided to reset the

latch 18 so as to prevent updates of the programmable memory 14 and optionally prevent read operations to the ROM 16. Thus, when the firmware update program executed from the ROM 16 is concluding it may activate the access latch reset output of the processor 10 to reset latch 18. In the example described above, the access latch reset output would reset latch 18 so that the "Q" output was set to a logical "0" so as to prevent write operations to the programmable memory 14 and prevent read operations to the ROM 16. Thus, the latch 18 may provide a security window during which the programmable memory 14 may be updated. The ROM 16 may provide an update program which may be securely maintained so as to reduce the likelihood of tampering with the update program because the hardware reset forced the processor 10 to a known non-debug state executing the software code of the update program which may reside in a non-updateable ROM such as ROM 16.

As will be appreciated by those of skill in the art, while **Figure 1** illustrates the processor 10, memory controller 12, programmable memory 14, the ROM 16 and the latch 18 as separate blocks, these blocks are functional blocks and need not correspond to physical divisions of the functions. Thus, for example, the memory controller 12, the ROM 16 and the latch 18 may be incorporated into a single integrated circuit. Furthermore, additional or fewer functional blocks may also be provided while still benefitting from the teachings of the present invention. For example, multiple memory controllers or no memory

controller could be provided. In multiple memory controller embodiments, the multiple memory controllers may receive the output of the access latch 18. In embodiments with no memory controllers, the processor 10 may receive the output of access latch 18 and control access to the programmable memory 14 and/or the ROM 16 itself. Thus, the present invention should not be construed as limited to the particular configuration illustrated in **Figure 1** but is intended to encompass other configurations capable of carrying out the operations and/or functions described herein.

An exemplary embodiment of a data processing system 230 suitable for use in accordance with embodiments of the present invention is illustrated in **Figure 2** and may include input device(s) 232 such as a keyboard or keypad, a display 234, and a programmable memory 236, a Read Only Memory 240 and a system memory 242 that communicate with a processor 238. The data processing system 230 may further include I/O data port(s) 246 or other such devices that also communicate with the processor 238. The I/O data port 246 can be used to transfer information between the data processing system 230 and another computer system or a network (e.g., the Internet) or to other devices controlled by the processor 238. These components may be conventional components such as those used in many conventional data processing systems which may be configured in accordance with the present invention to operate as described herein.

Figure 3 is a block diagram of data processing systems that illustrates systems, methods, and computer program products in accordance with embodiments of the present invention. The processor 238 communicates with the programmable memory 236, the read only memory 240 and the system memory 242 via one or more address/data bus(es) 248. The processor 238 can be any commercially available or custom microprocessor.

The programmable memory 236, read only memory 240 and the system memory 242 are representative of the overall hierarchy of memory devices containing the software and data used to implement the functionality of the data processing system 230. The programmable memory 236 can include, but is not limited to static RAM (SRAM), dynamic RAM (DRAM), flash RAM, EEPROM or other such programmable memory devices whose contents may be modified. The read only memory 240 may be of a type which may not be modified after its initial programming, such as ROM or PROM but may also be programmable in certain embodiments of the present invention. Finally, the system memory 242 may comprise one or more of the various types of memory, including the following types of devices: cache, ROM, programmable read only memory (PROM), electrically programmable read only memory (EPROM), EEPROM, flash RAM, SRAM, and DRAM. Thus, the particular designations of memory as programmable memory 236, read only memory 240 or system memory 242 should not be construed as limiting the types of devices utilized to implement such memory but as a characterization of the manner in

which the devices are utilized. Accordingly, any memory devices may be utilized that are capable of carrying out the operations described herein.

As shown in **Figure 3**, the read only memory **240**,  
5 may contain the update control program **282** and,  
optionally, a public key **284** which may be utilized to  
verify a digital signature of an update image. The  
programmable memory **236** may contain the firmware  
program **254** of the processing system **230** as well as  
10 data **256** which may include configuration data **270** for  
the processing system **230**.

The system memory **242** may contain several  
categories of software and data used in the data  
processing system **230**: the operating system **252**; the  
15 input/output (I/O) device drivers **258**; and the data  
**243**. As will be appreciated by those of skill in the  
art, the operating system **252** may be any operating  
system suitable for use with a data processing system,  
such as OS/2, AIX or OS/390 from International Business  
20 Machines Corporation, Armonk, NY, WindowsCE, WindowsNT,  
Windows95, Windows98 or Windows2000 from Microsoft  
Corporation, Redmond, WA, PalmOS from Palm, Inc., MacOS  
from Apple Computer, UNIX or Linux, proprietary  
operating systems or dedicated operating systems, for  
25 example, for embedded data processing systems.

The I/O device drivers **258** typically include  
software routines accessed through the operating system  
**252** to communicate with devices such as the input  
devices **232**, the display **234**, the I/O data port(s) **246**,  
30 and certain components of the programmable memory **236**,

read only memory 240 and/or system memory 242. The data 243 represents the static and dynamic data used by the operating system 252, I/O device drivers 258, and other software programs that may reside in the programmable memory 236, the read only memory 240 and/or the system memory 242. For example, the data 243 may include an update image 280 to be utilized in updating the contents of the programmable memory 236.

While the present invention is illustrated, for example, with reference to particular divisions of programs, functions and memories, the present invention should not be construed as limited to such logical divisions. Thus, the present invention should not be construed as limited to the configuration of **Figure 3** but is intended to encompass any configuration capable of carrying out the operations described herein. For example, in particular embodiments of the present invention a single memory array may be utilized to provide the programmable memory 236, the read only memory 240 and the system memory 242. Such a memory array may be partitioned into logical sub-arrays which may provide the access control aspects of embodiments of the present invention.

Embodiments of the present invention will now be described in more detail with reference to **Figures 4A** and **4B** which are flowchart illustrations of operations according to embodiments of the present invention. As seen in **Figure 4A**, upon assertion of a hardware reset signal (block 300) --such a reset may be asserted by hardware circuitry or by software assertion of the



hardware reset-- the update capability of the programmable memory of the processing system is enabled (block 302). Such an enable may be provided by the latch 18 providing an enable signal to the memory controller 12 to control write operations to programmable memory 14 in the system of Figure 1. However, as will be appreciated by those of skill in the art, other techniques of selectively enabling the update capabilities of a programmable memory may also be utilized in accordance with the teachings of the present invention.

With the update capability of the programmable memory enabled, an update program, which may be stored in a ROM, may be executed to perform the update of the programmable memory (block 304). When the update is complete (block 306), the update program may disable the update capability of the programmable memory (block 308). In the example illustrated in Figure 1, the update program may be executed from the ROM 16 and the latch 18 reset by the processor 10 according to instructions in the update program so as to prevent updates of the programmable memory 14 after completion of the update program. Again, however, as will be appreciated by those of skill in the art, other techniques of selectively disabling the update capabilities of a programmable memory may also be utilized in accordance with the teachings of the present invention. Whatever particular system is utilized, systems according to embodiments may provide an update window between, for example, the initiation

of the hardware reset and the completion of the update program during which the programmable memory may be updated. This update window may, among other things, reduce the likelihood of malicious attacks on the program stored in programmable memory.

**Figure 4B** illustrates operations according to further embodiments of the present invention. As is seen in **Figure 4B**, the operations are similar to those of **Figure 4A**, however, access to the update program (e.g. the ROM where the program is stored) is also enabled (block 320) by, for example, the hardware reset signal or the update capability of the programmable memory being enabled. Thus, for example, in the system illustrated in **Figure 1**, read access to the ROM 16 may be enabled when update capabilities of the programmable memory 14 are enabled. Thus, the latch 18 may also control access to the ROM 16 by the processor 10. After enabling access to the memory where the update program is stored, the update program is executed (block 304) and, when complete (block 306), the update access to the programmable memory is disabled (block 308) and the read access to the memory where the update program is stored is also disabled (block 322).

In the example illustrated in **Figure 1**, the update program may be executed from the ROM 16 and the latch 18 reset by the processor 10 according to instructions in the update program so as to prevent updates of the programmable memory 14 and prevent read access to the ROM 16 after completion of the update program.

However, as will be appreciated by those of skill in

the art, other techniques of selectively enabling and disabling access to the memory where the update program is stored may also be utilized in accordance with the teachings of the present invention. Thus, in the  
5       embodiments illustrated in **Figure 4B**, update capabilities of the programmable memory and access to the update program may be windowed by, for example, the hardware reset and the completion of the update  
10       program. By restricting access to the program to the limited window when the programmable memory may be updated, the likelihood that the update program may be analyzed or otherwise accessed for purposes of overcoming the security features provided by  
15       embodiments of the present invention may be reduced.

**Figure 5** illustrates operations according to embodiments of the present invention for performing an update of firmware or other data stored in a programmable memory. For example, in certain  
20       embodiments of the present invention, the operations of **Figure 5** may correspond to blocks 304, 306, 308 and 322 of **Figures 4A** and/or **4B**. As is seen in **Figure 5**, update data may be obtained by providing an "image" of the data to be written to a programmable memory, for example, the programmable memory **14**. So as to assure  
25       the authenticity of the image to be written to memory, the image may be digitally signed or otherwise encrypted utilizing, for example, an asymmetric key cryptosystem. Asymmetric (or public) key cryptosystems typically use two different keys that are not feasibly  
30       derivable from one another, one for encryption and another for decryption. A person wishing to receive

secure data generates a pair of corresponding encryption and decryption keys. The encryption key is made public, while the corresponding decryption key is kept secret. Anyone wishing to provide encrypted data to the receiver may encrypt the data using the receiver's public key. Only the receiver may decrypt the message, since only the receiver has the private key.

Asymmetric-key cryptosystems may also be used to provide for digital signatures, in which the sender encrypts a signature message using the sender's private key, the signature message being a hash or message digest of the message being signed. See, for example, Advanced Cryptography by Bruce Schneier, MD4 and MD5 on pp. 435-441, for a description of conventional hash functions suitable for digital signatures. Because the signature message can only be decrypted with the sender's public key, the recipient can use the sender's public key to confirm that the signature message originated with the sender. One of the best-known asymmetric-key cryptosystems is RSA, named for its originators Rivest, Shamir and Adleman. One version of RSA is defined by ANSI Standard X9.31-1998.

RSA is widely used in many cryptographic systems. RSA gets its security from the difficulty of factoring large prime numbers. See Schneier, *op. cit.*, pp. 466-474, for a description of RSA.

Returning to **Figure 5**, in performing an update, preferably during the update window of **Figures 4A** or **4B** described above, when the processor begins execution of the update program it may be determined if an update is

available (block 400). This determination may be made in different manners depending on the particular device or processing system incorporating embodiments of the present invention. For example, in a personal  
5 computer, the determination may be made by looking for a special key being held down at boot or a selection on the initial BIOS menu, the existence of a diskette in a drive with a certain volume name, or a particular response to a broadcast over a local area network (LAN)  
10 adapter.

For a remotely managed device such as a router, the determination may be made by examining a hardware flag and persistent parameters which are preserved over reset, or even by looking for a firmware image left in  
15 RAM by the last boot of the device. One scenario may entail an authorized administrator sending a firmware file to the device via a network protocol such as Trivial File Transfer Protocol (TFTP). The file would be placed in a reserved scratch pad area of RAM. The  
20 administrator would then force a hardware reset through the management software, causing the device's non-writable boot ROM to examine the scratch pad RAM for a valid firmware update image.

As may be seen from the above example, various  
25 mechanisms may be utilized for determining that a firmware update is available and, thus, the present invention should not be construed as limited to a particular methodology of determining if a firmware update is available but may use differing mechanisms  
30 depending on the resources and capabilities of the

device incorporating the embodiments of the present invention.

If an update is not available (block 400), then the update program may terminate by disabling access to the programmable memory (block 412). However, if an update is available (block 400), then the update may be read into scratchpad memory (block 402), such as RAM, for evaluation and authentication. The update image may be read into memory from various sources including a floppy disk, a CD-ROM or other removable or fixed media, from a serial port, from a LAN attached server, etc. If the image is already placed into RAM or other scratchpad memory by, for example, an administrator, then the operations of block 402 may be skipped.

Alternatively, the existing firmware image could be backed-up by copying it to an unused memory range before the new image replaces the original. Such a copy could provide a source allowing an option to restore the previous firmware if the new image proved to be flawed. The signature of the former firmware image would be checked before reinstallation to ensure that it has not been modified or corrupted. Such a copy could be made in the programmable memory and returned to by modifying pointers to reflect the copy location or could be in a separate memory and then restored to the programmable memory. By combining the restore capability with instructions for performing an update imbedded in the image, a system that allowed enablement of new features without reinstallation of the image could be provided.

As described above, the candidate image may include a certificate or chain of certificates which may provide a means of verifying a digital signature included with the update image. The update program  
5 utilizes a public key corresponding to the private key of the authority authorized to provide updates and verifies the signature of the update image using the public key (block 404). If the results do not match, then the signature is not verified (block 406) and the  
10 image is rejected, the update procedure terminated and the latch set to disable updates (block 412).

For example, the public key of an X.509 certificate authority may be incorporated in the ROM where the update program is stored and utilized to  
15 verify a certificate provided with the update image by decrypting the signature of the certificate utilizing the public key as described above and comparing the results to an expected result, such as a hash computed using the hash algorithm specified in the certificate.  
20 Alternatively, the public key may be incorporated in a previous update image and the update program may access the programmable memory to obtain the previous public key to verify the signature. The subsequent image could then provide a new public key for future use by  
25 the update program. This means that the update program would verify the signature of a new firmware image using the public key field from the current firmware image. Thus, the trust tree may be updated in the firmware revision process. Updating the trust tree may  
30 provide additional flexibility, for example, in case of future changes in certificate authorities, in case a

product line is sold to a different company, or in case  
a merger takes place in which a product introduced by  
one manufacturer is later supported by a different  
manufacturer. In such a manner the public key utilized  
5 by the update program need not be static but may be  
dynamically changed.

If the update image is verified, then it may be  
determined if the image is intended for the device  
(block 408). This determination may be made, for  
10 example, by evaluating the target machine model(s) or  
serial number(s), trust chain, prior firmware release  
level prerequisite or other parameters governing the  
upgrade. Rules for determining if the intended image  
is intended for the device may be incorporated in the  
15 update program, the update image, certificate  
extensions associated with the update image or  
combinations thereof. If the update is not intended  
for the device, the update procedure may be terminated  
and the latch set to disable updates (block 412). In  
20 alternative embodiments of the present invention, the  
determination of whether the update image is intended  
for a particular device may be made by signing the  
image with differing private keys based on the public  
key provided in a previous update image. In such a  
25 system, the determination of whether the signature was  
verified may also be utilized to determine if the  
update image is intended for the device.

If the update is intended for the device (block  
408), then the update may be performed (block 410).

30 Such an update may be performed by copying the image  
from scratchpad memory to the programmable memory. If



the hardware architecture for a particular machine requires that firmware execute from high-speed RAM (rather than, for example, from flash RAM), the image may be copied from scratchpad memory to a high-speed RAM before the update is performed. The update may be performed by the update program in the ROM, or the firmware image may contain executable code to perform the firmware update such as by selectively patching the programmable memory, or a combination of updates may be performed by the update program in the ROM and the program provided with the image. When the update procedure is complete, the latch may be set to disable updates (block 412).

In embodiments of the present invention where the update image includes instructions to perform the update, these instruction may include instructions on how to write the image to the programmable memory. These instructions could be by way of executable code containing an installation program which may be used to perform a sophisticated differential patching procedure on the firmware or extend the basic "all or nothing" certificate extension rules to include installation of enhancements based on local persistent variables such as a license key resulting from an earlier web or telephone transaction. For example, when a customer pays for a particular hardware feature, the customer could receive a license key based on his device serial number, which would allow the customer to reinstall the current standard firmware image release to enable the new feature (as the license key may be based on the unique machine serial number it, typically, cannot be

used to apply the feature on any other machine). As described in more detail below, such a system may provide new business models for hardware sales, such as "web upgradeable hardware," allowing the manufacturer to distribute a generic device to a large user population at a low entry price (for example as an Internet Service Provider subsidized entry-level personal computer, cable or DSL modem, etc.), and then provide enhanced functionality to the install-base with for-fee upgrade features.

**Figure 6** illustrates operations for performing an update according to embodiments of the present invention utilizing a certificate chain to verify the authenticity of the update image. As is seen in block **450**, the certificate chain and signature are obtained from the update image. The signature of the first certificate in the chain is then decrypted utilizing the public key available to the update program (block **452**). If the signature is invalid (block **454**), the update process is terminated and the update of programmable memory disabled (block **470**). If the signature is valid (block **454**), the public key of the next certificate is extracted from the certificate and the signature of the next certificate in the chain decrypted utilizing the extracted public key (block **456**). If this next certificate does not have a valid signature (block **458**), the update process is terminated and the update of programmable memory disabled (block **470**). This process is repeated until all of the

certificates/signatures in the chain of certificates have been evaluated (block 460).

The image signature is verified with the appropriate public key (block 464). If the signature is invalid (block 466), the update process is terminated and the update of programmable memory disabled (block 470). If the signature is valid (block 466), the update is performed (block 468), the update process is completed, and the update of programmable memory disabled (block 470).

**Figure 6** describes possible logical sequences that may be to validate certificates in a chain. In **Figure 6**, the chain is checked from the highest level in the chain, the certificate authority, towards the lowest level, the update authority's certificate. Checking may also be performed in the reverse order, from the lowest-level certificate towards the root certificate authority's certificate, stopping when one recognizes the public key that signed a particular certificate as being trusted.

Thus, as seen in **Figures 5** and **6**, embodiments of the present invention may utilize a certificate or a chain of certificates, preferably in connection with the windowing aspects described with reference to **Figures 4A** and **4B**, to provide increased security for programmable memory updates, such as firmware updates. The use of signed update images may, for example, decrease the likelihood that a firmware update may be "faked" by a malicious third party or an unauthorized firmware update applied.

Figure 7 is a block diagram illustrating a certificate structure having certificate extensions which may be utilized in rules-based embodiments of the present invention. As seen in Figure 7, a certificate chain 500 is illustrated as having a plurality of certificates 510, 510' and 510''. The certificates each may include a digital signature 520, 520' and 520'', the public key of a next level in the certificate chain 522, 522' and 522'' and may include as an extension to the certificate 524, 524' and 524'', firmware usage rules which may specify rules which may be utilized in determining the application of the update image associated with the certificate chain 500. While illustrated in each of the certificates 510, 510', and 510'', firmware usage rules may be incorporated into less than all of the certificates 510, 510', and 510'', or even in a single certificate. For example, in Figure 7 the public key 522 can be used to verify the certificate 510' and the public key 522' can be used to verify certificate 510'', which is the highest certificate in the chain shown here. The public key of the root certificate authority is known a priori. Usually the top certificate in the chain is the certificate of the certificate authority and is usually self-signed. Furthermore, the firmware usage rules may be incorporated as extensions to the certificates. Certificate extensions are known to those of skill in the art and, therefore, will not be described further herein.



different brand names, all of which may provide for improved business methods.

For example, a manufacturer might release a firmware patch that should be applied to fix a problem in a chip found on Ethernet adapters with a certain range of Media Access Controller (MAC) addresses in two models of its cable routers sold under two brand names running some range of firmware versions. The firmware update could be provided to all cable routers and the rules could evaluate the MAC addresses of the cable router to determine if the update was to be applied.

Operations for providing firmware updates utilizing a certificate hierarchy in an exemplary development environment having an update authority which develops firmware updates, a brand level associated with a particular brand of a device, a manufacturer level associated with the manufacturer of the device and a certificate authority associated with the public key of the update programs of the devices are illustrated in **Figure 8**. As seen in **Figure 8**, the firmware update(s) is developed (block 600) and may include differing functionality for a generic device or may be compatible with multiple different devices. As described above, the firmware update may include an installation program that may apply patches or may replace the firmware in the programmable memory in its entirety. Alternatively, the firmware update may set flags or otherwise enable particular functions in the existing firmware stored in the programmable memory.

In certain embodiments of the present invention, the update image may be accompanied by a digital



certificate, and the same given certificate, from the parent's perspective, as the "child".

5 A chain of certificates is an arbitrary number of certificates consisting of a child, that child's parent, the parent's parent, etc. Every certificate except the highest one in the chain is signed by the private key of its parent, indicating that parent's trust for its child. By traversing the certificate chain -- typically from the bottom to the top -- a  
10 recipient is able to establish an unbroken chain of trust that allows it to trust the child if it trusts one of the child's parents.

To authenticate an update image and prove its integrity, the recipient may compute a hash of the  
15 image, decrypt the signature using the public key of the signer (which is provided as part of the signer's certificate), and compare the result with the computed hash. If they match, the image's integrity and the signer's authenticity are considered established.  
20 However, to establish the recipient's trust of the signer, the recipient traverses and validates each certificate in the certificate chain, cryptographically establishing a chain of trust back to a trusted certificate authority, as follows.

25 The recipient examines the next-higher (parent) certificate in the certificate chain. The parent conveys its trust of the child by digitally signing the child's certificate using the parent's private key. Validation of the parent's trust for the child may be  
30 done by computing a hash of the child's certificate, decrypting the provided signature with the public key



of the parent (provided in the parent's certificate),  
and comparing the result with the computed hash. If  
the results match, the recipient has cryptographically  
established that the parent trusted the child, and by  
5 inference the recipient can trust the child. This  
process is repeated recursively for each next-higher  
certificate in the chain until the recipient encounters  
a certificate that it can validate using a public key  
that it possesses *a priori* and, therefore, is part of a  
10 pre-existing trust relationship with the owner of the  
public key. Typically this is the certificate of a  
trusted root certificate authority, although it need  
not be the top entity in the chain.

In certain circumstances less than all of the  
15 chain may be analyzed if a trusted entity is reached  
before the end of the chain. Furthermore, certificates  
in the chain which are parents to a certificate of the  
trusted entity but which are not otherwise trusted may  
be ignored, as the recipient may be unable to establish  
20 that they are trusted absent a parent to such  
certificates being trusted by the recipient. Because  
the certificates may contain rules for application of  
an update image, to avoid unauthorized or unscrupulous  
manipulation of the application of the update image,  
25 the application rules which are utilized in applying an  
update may be limited to those rules from a certificate  
for which a trust relationship has been established.  
Thus, any rules provided in certificates without an  
established trust relationship may be disregarded.  
30 Accordingly, in certain embodiments of the present  
invention, less than all of the certificates in a

certificate chain (i.e. a hierarchy of certificates)  
may be evaluated. Alternatively all of the  
certificates in a chain may be evaluated and those for  
which a trust relationship has been established  
5 utilized in performing an update.

After developing the firmware update, the update  
image is signed with a private key (block 602) of an  
update authority. The image update is provided to a  
10 recipient along with the digital signature and a  
certificate chain containing a certificate of the  
update authority corresponding to the private key  
(block 604). The update authority's certificate may  
contain update conditions in certificate extensions  
15 (block 604).

Any one or more of the certificates in the chain  
may incorporate rules in a certificate extension, which  
a recipient may utilize to selectively apply the  
firmware update. The incorporation of such rules are  
20 shown in blocks 604, 606, and 608.

In the example shown in **Figure 8**, the update  
authority could be a product support group that is  
responsible for creating image updates. Its parent  
could be a brand authority that authorizes the product  
support group to create updates for the product line  
25 that it manages (block 606). The brand authority's  
parent could be a manufacturer or corporation that  
authorizes the brand authority to manage the brand on  
its behalf (block 608). The manufacturer's parent  
30 could be a root certificate authority that certifies

the manufacturer's authenticity as a legally responsible business entity (block 610). The Figure 8 example shows a certificate chain comprising four certificates, although a different number of certificates (as few as one) could be used while still benefitting from the teachings of the present invention. Thus, the present invention should not be construed as limited to a particular number of certificates.

The firmware update signed by the update authority and the certificate chain is distributed to a recipient (block 612).

By providing a chain of certificates, the integrity of the update image may be maintained during the development and distribution process. Furthermore, by providing for rules which may control how the update image is applied, a common update image may be utilized to provide differing functionality to a generic device or provide differing updates for differing devices. Such applications may be controlled by the particular authorities which provide the certificates in the chain.

While the present invention has been described with reference to four authorities, as will be appreciated by those of skill in the art, differing numbers of authorities may be utilized, including a single authority. Furthermore, the authorities described herein are provided merely as an example. Thus, the present invention should not be construed as limited to the particular examples described herein.

Figure 9 illustrates operations for performing an update based on rules specified in a certificate chain as illustrated in Figure 7 which may be generated as illustrated in Figure 8. As is seen in block 650, the certificate chain and signature are obtained from the update image. Additionally, the update flag may be reset to a "NO" condition and any other initialization performed. The signature of the highest certificate in the chain is then decrypted utilizing the public key available to the update program (block 652). If the signature is absent or invalid (block 654), the update process is terminated and the update of programmable memory disabled (block 680). If the signature is valid (block 654), it may be determined based on the rules in the extension of the certificate if the update image is to be applied to the device (block 656), if so, then a flag may be set to perform the update (block 658). Any instructions on how to perform the update or otherwise process the update image may also be extracted from the extension to the certificate at block 658.

In any event, the public key of the next certificate is extracted from the certificate and the signature of the next certificate in the chain decrypted utilizing the extracted public key (block 660). If this next certificate does not have a valid signature (block 662), the update process is terminated and the update of programmable memory disabled (block 680). If the signature is valid (block 662), it may be determined based on the rules in the extension of the certificate if the update image is to be applied to the

device (block 664). If so, a flag may be set to perform the update (block 666). Any instructions on how to perform the update or otherwise process the update image may also be extracted from the extension to the certificate at block 666. This process is repeated until all of the certificates/signatures in the chain of certificates have been evaluated (block 668). Once all the certificates have been processed, it may be determined if the update flag is set (block 670). If the update flag is not set, then the update process is terminated and the update of programmable memory disabled (block 680). If the update flag is set (block 670), then the update image may be further processed as described below.

The image signature is verified with the appropriate public key (block 674). If the signature is invalid (block 676), the update process is terminated and the update of programmable memory disabled (block 680). If the signature is valid (block 676), the update is performed (block 678), the update process is completed, and the update of programmable memory disabled (block 680).

In either case, where the update is performed, the update may be performed utilizing any parameters or instructions identified in the certificate extensions. Thus, the update may be performed entirely by the update program, by an installation program provided with the image, or by a combination of the two. Furthermore, the installation process may involve any

of the techniques described herein for updating the programmable memory.

**Figure 10** is a block diagram of a system which may provide for the distribution and application of firmware updates according to embodiments of the present invention. A firmware update repository **700** may be provided which includes the firmware update images and/or the corresponding certificates associated with a firmware update. The firmware update repository **700** may be separate from or incorporated with a firmware distribution function **702** which allows for the distribution of firmware updates from the firmware update repository **700** to a plurality of updateable devices **706** and **706'** which may be configured and operate as described herein. The firmware update repository **700** and the software distribution function **702** may be servers or other such devices known to those of skill in the art for storing and distributing software. The updateable devices **706** and **706'** may be any type of computing device capable of carrying out some or all of the operations described herein. The firmware updates may be distributed over a network **704** which may be the Internet or an intranet. Alternatively, the firmware may be distributed via removable storage media such as diskettes or CD-ROMs. As will be appreciated by those of skill in the art in light of the present disclosure, the embodiments illustrated in **Figure 10** may provide a new method of doing business.

**Figure 11** illustrates operations for carrying out firmware distribution and update according to embodiments of the present invention which may provide a plurality of different devices having different functionality based on the distribution of a generic computing device. As is seen in **Figure 11**, generic devices which are capable of having their functions defined by firmware loaded in the device and having a secure firmware update capability as described herein are distributed (block **710**). Firmware updates are then distributed to the devices so as to define the functions of the device based on an authorization associated with the device (block **712**). Such authorization may be provided, for example, by identifying a serial number, MAC address license key or other identifier associated with the device, which may be used to provide authorization to the device to update the firmware of the device to provide the authorized functionality. The firmware update may then be provided to the various devices so as to provide differing levels of functionality based on the device on which the firmware update is performed (block **714**). As will be appreciated by those of skill in the art in light of the present disclosure, the embodiments illustrated in **Figure 10** may provide a new method of doing business.

While the present invention has been described primarily with reference to personal computers, the teachings of the present invention may be equally applicable to many other types of computing devices utilizing a programmable memory, such as routers,

switches, programmable digital assistants, telephones, pagers, laptop computers, CD-ROM drives, palm-tops, video adapters, printers, cable modems, asynchronous digital subscriber loop (ADSL) modems, satellite receivers, digital televisions, home appliances containing embedded microprocessors, information appliances, digital watches, game consoles, handheld organizers, and so forth.

Furthermore, with the recent developments in short-range networking, such as Bluetooth radio and carrier current power networks, the present invention may be applicable to many new micro-controller based products. For example, a pair of wireless stereo headphones containing a microprocessor, memory, communication capability, and voice input/output capability could be securely upgraded to become a cellular telephone, a personal messaging system, a music-file download manager, or a pager, by means of a microcode download transmitted wirelessly from, for example, the Internet, based on the functionality paid for by the user. Similarly, the microcode controlling a digital signal processor, such as that in a modem or a Bluetooth-capable Palm Pilot, could be upgraded to add entirely new functions and features, for example, faster new layer-1 framing protocols, new encryption algorithms, a new user interface, a new operating system version, etc.

The present invention may also be applicable to other types of upgrades including performance enhancements or upgrades to accommodate new parameters not available at the time of distribution of the



product. For example, a washing machine that senses what types of clothing are in the load and adjusts its wash cycle accordingly could be upgraded when new fabric types are manufactured, a power tool that  
5 receives new instructions on how to cut patterns, or a solar powered lawn mower acquiring new functionality as a result of a firmware update. In the latter example, new ephemeris tables could be loaded into a solar-  
10 powered lawn mower based on the lawn mower's new geographical location sensed by a GPS module and the season, enabling adjustment of the solar panel angle for optimum power.

Other examples of applications of the present invention may include the automotive field. A basic  
15 automobile with programmable features could be shipped to the dealer. The customer orders the automobile and selects certain extra features, such as a different engine controller for higher performance, a higher-quality radio, climate control, automatic seat  
20 adjustment, keyless entry, and cellular phone. The dealership orders the features from the manufacturer digitally, receives the keys which are keyed to the specific automobile's make and serial number, pays for the features, and installs them to the automobile using  
25 wireless (or wired) transmission of the new firmware. Such a system may reduce the cost to manufacture or install custom features in an automobile, and ,also, may prevent theft by the customer and by the dealer from the manufacturer, as only features that have been  
30 paid for can be installed, and only on one particular automobile. As will be appreciated by those of skill

in the art in light of the present disclosure, new methods of doing business by altering the supply chain between the manufacturer and the consumer and providing a means for dynamically and securely updating device functionality may be provided in embodiments of the present invention.

Thus, as described above, embodiments of the present invention which may provide secure updates of programmable memories may be applicable to a wide array of devices and may even provide new paradigms for the distribution of goods and services. Such a paradigm may be advanced because the secure and customizable selective applications of firmware updates may provide for differing levels of functionality on hierarchical levels from global updates to specific device updates. A manufacturer or service provider may control the functionality of devices utilizing embodiments of the present invention with a possible reduced exposure to theft by either malicious third parties or by unauthorized customers or even parties in the distribution chain.

The flowcharts and block diagrams of **Figures 1** through **11** illustrate the architecture, functionality, and operation of possible implementations of certificates and the use of certificates according to the present invention. In this regard, each block in the flow charts or block diagrams represents a module, segment, or portion of code, which comprises one or more executable instructions for implementing the specified logical function(s). It should also be noted that in some alternative implementations, the functions

noted in the blocks may occur out of the order noted in the figures. For example, two blocks shown in succession may in fact be executed substantially concurrently or the blocks may sometimes be executed in the reverse order, depending upon the functionality involved.

In the drawings and specification, there have been disclosed typical preferred embodiments of the invention and, although specific terms are employed, they are used in a generic and descriptive sense only and not for purposes of limitation, the scope of the invention being set forth in the following claims.

THAT WHICH IS CLAIMED:

1. A method of controlling updates of a programmable memory of a device, the method comprising:

obtaining an update image corresponding to the update of the programmable memory;

5 obtaining a certificate associated with the update image, the certificate having update application rules in at least one extension of the certificate;

extracting the update application rules from the at least one extension of the obtained certificate; and

10 selectively updating the programmable memory based on the update image and the update application rules extracted from the obtained certificate.

2. A method according to Claim 1, wherein the update application rules comprise at least one of rules information associated with a manufacturer of the device, rules information associated with a brand of the device, rules information associated with a software version of the device, rules information associated with a license authorization of the device or rules associated with the individual device.

3. A method according to Claim 1, wherein the update application rules comprise rules defining devices for which application of the update image is authorized.

4. A method according to Claim 3, wherein the rules defining devices comprise rules specifying at

least one of authorized device serial numbers, authorized firmware versions, authorized device manufacturers and authorized users associated with a device.

5. A method according to Claim 1, wherein the update application rules comprise rules defining how data from the update image is utilized to update the programmable memory.

6. A method according to Claim 1, wherein the update application rules comprise rules which identify installation information provided with the update image and wherein the step of updating the programmable memory comprises updating the programmable memory utilizing the installation information provided with the update image.

7. A method according to Claim 6, wherein the installation information comprises an install program and wherein the step of updating the programmable memory utilizing the installation information comprises executing the install program to write the update data to the programmable memory.

8. A method according to Claim 1, further comprising verifying the authenticity of the update image.

9. A method according to Claim 8, wherein the step of verifying the authenticity of the update

comprises the step of evaluating the certificate  
associated with the update image to determine if a  
valid digital signature is provided with the image.

10. A method according to Claim 8, wherein the  
step of verifying the authenticity of the update image  
comprises the step of determining if a valid digital  
signature is provided with the image by decrypting the  
digital signature provided with the image using a  
shared secret.

11. A method according to Claim 9, wherein the  
step of evaluating the certificate comprises the steps  
of:

decrypting a digital signature of the certificate  
utilizing a public key of a certificate authority  
accessible to the update program; and

comparing the decrypted digital signature with a  
precomputed value to determine if the digital signature  
is a valid digital signature associated with the  
certificate authority.

12. A method according to Claim 11, wherein the  
public key is stored in a non-updateable memory.

13. A method according to Claim 11, further  
comprising the steps of:

providing the public key of the certificate  
authority in a previous version of data to be stored in  
the programmable memory; and

wherein the step of decrypting a digital signature of the certificate utilizing a public key further comprises the step of obtaining the public key from the programmable memory.

14. A method according to Claim 8, wherein the update image includes a plurality of certificates in a hierarchy of certificates and wherein the step of verifying the authenticity of the update comprises the step of evaluating certificates of the plurality of certificates in the update image to determine if a valid digital signature is provided with the certificates of the update image.

15. A method according to Claim 14, wherein the step of evaluating each of the digital certificates comprises the steps of:

decrypting a digital signature of a certificate utilizing a public key associated with a next-higher certificate in the hierarchy;

comparing the decrypted digital signature with a precomputed value to determine if the digital signature is a valid digital signature associated with the certificate;

obtaining a public key associated with another of the digital certificates;

repeating the steps of decrypting and comparing utilizing the obtained public key associated with another of the digital certificates; and

wherein the step of obtaining a public key is repeated until a public key associated with a digital

20 certificate of a trusted certificate authority is  
obtained, and comparing the of the trusted certificate  
authority public key with a predetermined value.

5 16. A method according to Claim 1, wherein the  
update image includes a plurality of certificates in a  
hierarchy of certificates and wherein the extracting  
the update application rules comprises the step of  
extracting update application rules from each of the  
certificates in the hierarchy of certificates having  
update application rules provided in an extension of  
the certification.

17. A method according to Claim 16, wherein the  
programmable memory is updated with the update image  
only if all of the update application rules indicate  
that the update image is applicable to the device.

18. A method according to Claim 16, wherein the  
programmable memory is updated with the update image if  
any of the update application rules indicate that the  
update image is applicable to the device.

19. A method according to Claim 1, wherein the  
programmable memory is updated with the update image if  
any of the update application rules indicate that the  
update image is applicable to the device.

20. A method according to Claim 1, wherein the  
programmable memory is updated with the update image



only if all of the update application rules indicate that the update image is applicable to the device.

21. A system for controlling updates of a programmable memory of a device, comprising:

means for obtaining an update image corresponding to the update of the programmable memory;

5 means for obtaining a certificate associated with the update image, the certificate having update application rules in at least one extension of the certificate;

10 means for extracting the update application rules from the at least one extension of the obtained certificate; and

15 means for selectively updating the programmable memory based on the update image and the update application rules extracted from the obtained certificate.

22. A system according to Claim 21, wherein the update application rules comprise at least one of rules information associated with a manufacturer of the device, rules information associated with a brand of the device, rules information associated with a software version of the device, rules information associated with a license authorization of the device or rules associated with the individual device.

23. A system according to Claim 21, wherein the update application rules comprise rules defining

devices for which application of the update image is authorized.

24. A system according to Claim 23, wherein the rules defining devices comprise rules specifying at least one of authorized device serial numbers, authorized firmware versions, authorized device manufacturers and authorized users associated with a device.

25. A system according to Claim 21, wherein the update application rules comprise rules defining how data from the update image is utilized to update the programmable memory.

26. A system according to Claim 21, wherein the update application rules comprise rules which identify installation information provided with the update image and wherein the means for updating the programmable memory comprises means for updating the programmable memory utilizing the installation information provided with the update image.

27. A system according to Claim 26, wherein the installation information comprises an install program and wherein means for updating the programmable memory utilizing the installation information comprises means for executing the install program to write the update data to the programmable memory.

28. A system according to Claim 21, further comprising means for verifying the authenticity of the update image.

29. A system according to Claim 28, wherein the means for verifying the authenticity of the update comprises means for evaluating the certificate associated with the update image to determine if a valid digital signature is provided with the image.

30. A system according to Claim 28, wherein the means for verifying the authenticity of the update image comprises means for determining if a valid digital signature is provided with the image by decrypting the digital signature provided with the image using a shared secret.

31. A system according to Claim 29, wherein the means for evaluating the certificate comprises:

means for decrypting a digital signature of the certificate utilizing a public key of a certificate authority accessible to the update program; and

means for comparing the decrypted digital signature with a precomputed value to determine if the digital signature is a valid digital signature associated with the certificate authority.

32. A system according to Claim 31, wherein the public key is stored in a non-updateable memory.

33. A system according to Claim 31, further comprising:

means for providing the public key of the certificate authority in a previous version of data to be stored in the programmable memory; and

wherein the means for decrypting a digital signature of the certificate utilizing a public key further comprises means for obtaining the public key from the programmable memory.

34. A system according to Claim 28, wherein the update image includes a plurality of certificates in a hierarchy of certificates and wherein the means for verifying the authenticity of the update comprises means for evaluating certificates of the plurality of certificates in the update image to determine if a valid digital signature is provided with evaluated certificates of the update image.

35. A system according to Claim 34, wherein the means for evaluating each of the digital certificates comprises:

means for decrypting a digital signature of a certificate utilizing a public key associated with a next-higher certificate in the hierarchy;

means for comparing the decrypted digital signature with a precomputed value to determine if the digital signature is a valid digital signature associated with the certificate;

means for obtaining a public key associated with another of the digital certificates;

means for repeatedly obtaining a public key,  
decrypting a digital signature and comparing the  
15 decrypted digital signature with a precomputed value  
until a public key associated with a digital  
certificate of a trusted certificate authority is  
obtained; and

means for comparing the public key of the digital  
20 certificate of the trusted certificate authority with a  
predetermined value.

36. A system according to Claim 21, wherein the  
update image includes a plurality of certificates in a  
hierarchy of certificates and wherein the means for  
extracting the update application rules comprises means  
5 for extracting update application rules from each of  
the certificates in the hierarchy of certificates  
having update application rules provided in an  
extension of the certification.

37. A system according to Claim 36, wherein the  
programmable memory is updated with the update image  
only if all of the update application rules indicate  
that the update image is applicable to the device.

38. A system according to Claim 36, wherein the  
programmable memory is updated with the update image if  
any of the update application rules indicate that the  
update image is applicable to the device.

39. A system according to Claim 21, wherein the  
programmable memory is updated with the update image if

any of the update application rules indicate that the update image is applicable to the device.

40. A system according to Claim 21, wherein the programmable memory is updated with the update image only if all of the update application rules indicate that the update image is applicable to the device.

41. A computer program product for controlling updates of a programmable memory of a device, comprising:

a computer readable media having computer readable program code embodied therein, the computer readable program code comprising:

computer readable program code which obtains an update image corresponding to the update of the programmable memory;

computer readable program code which obtains a certificate associated with the update image, the certificate having update application rules in at least one extension of the certificate;

computer readable program code which extracts the update application rules from the at least one extension of the obtained certificate; and

computer readable program code which selectively updates the programmable memory based on the update image and the update application rules extracted from the obtained certificate.

42. A computer program product according to Claim 41, wherein the update application rules comprise at

least one of rules information associated with a  
manufacturer of the device, rules information  
associated with a brand of the device, rules  
information associated with a software version of the  
device, rules information associated with a license  
authorization of the device or rules associated with  
the individual device.

43. A computer program product according to Claim  
41, wherein the update application rules comprise rules  
defining devices for which application of the update  
image is authorized.

44. A computer program product according to Claim  
43, wherein the rules defining devices comprise rules  
specifying at least one of authorized device serial  
numbers, authorized firmware versions, authorized  
device manufacturers and authorized users associated  
with a device.

45. A computer program product according to Claim  
41, wherein the update application rules comprise rules  
defining how data from the update image is utilized to  
update the programmable memory.

46. A computer program product according to Claim  
41, wherein the update application rules comprise rules  
which identify installation information provided with  
the update image and wherein the computer readable  
program code which updates the programmable memory

comprises computer readable program code which updates the programmable memory utilizing the installation information provided with the update image.

5 47. A computer program product according to Claim 46, wherein the installation information comprises an install program and wherein the computer readable program code which updates the programmable memory utilizing the installation information comprises computer readable program code which executes the install program to write the update data to the programmable memory.

48. A computer program product according to Claim 41, further comprising computer readable program code which verifies the authenticity of the update image.

5 49. A computer program product according to Claim 48, wherein the computer readable program code which verifies the authenticity of the update comprises computer readable program code which evaluates the certificate associated with the update image to determine if a valid digital signature is provided with the image.

5 50. A computer program product according to Claim 48, wherein the computer readable program code which verifies the authenticity of the update image comprises computer readable program code which determines if a valid digital signature is provided with the image by



decrypting the digital signature provided with the image using a shared secret.

51. A computer program product according to Claim 49, wherein the computer readable program code which evaluates the certificate comprises:

5 computer readable program code which decrypts a digital signature of the certificate utilizing a public key of a certificate authority accessible to the update program; and

10 computer readable program code which compares the decrypted digital signature with a precomputed value to determine if the digital signature is a valid digital signature associated with the certificate authority.

52. A computer program product according to Claim 51, wherein the public key is stored in a non-updateable memory.

53. A computer program product according to Claim 51, further comprising:

5 computer readable program code which provides the public key of the certificate authority in a previous version of data to be stored in the programmable memory; and

10 wherein the computer readable program code which decrypts a digital signature of the certificate utilizing a public key further comprises computer readable program code which obtains the public key from the programmable memory.

54. A computer program product according to Claim 48, wherein the update image includes a plurality of certificates in a hierarchy of certificates and wherein the computer readable program code which verifies the authenticity of the update comprises computer readable program code which evaluates certificates of the plurality of certificates in the update image to determine if a valid digital signature is provided with the evaluated certificates of the update image.

55. A computer program product according to Claim 54, wherein the computer readable program code which evaluates each of the digital certificates comprises:

computer readable program code which decrypts a digital signature of a certificate utilizing a public key associated with a next-higher certificate in the hierarchy;

computer readable program code which compares the decrypted digital signature with a precomputed value to determine if the digital signature is a valid digital signature associated with the certificate;

computer readable program code which obtains a public key associated with another of the digital certificates;

computer readable program code which repeatedly obtains a public key, decrypts a digital signature and compares the decrypted digital signature with a precomputed value until a public key associated with a digital certificate of a trusted certificate authority is obtained; and

computer readable program code which compares the public key of the digital certificate of the trusted certificate authority with a predetermined value.

56. A computer program product according to Claim 41, wherein the update image includes a plurality of certificates in a hierarchy of certificates and wherein the computer readable program code which extracts the update application rules comprises computer readable program code which extracts update application rules from each of the certificates in the hierarchy of certificates having update application rules provided in an extension of the certification.

57. A computer program product according to Claim 56, wherein the programmable memory is updated with the update image only if all of the update application rules indicate that the update image is applicable to the device.

58. A computer program product according to Claim 56, wherein the programmable memory is updated with the update image if any of the update application rules indicate that the update image is applicable to the device.

59. A computer program product according to Claim 41, wherein the programmable memory is updated with the update image if any of the update application rules indicate that the update image is applicable to the device.

60. A computer program product according to Claim 41, wherein the programmable memory is updated with the update image only if all of the update application rules indicate that the update image is applicable to the device.

61. A certificate for use in updating a programmable memory, the certificate comprising:  
a digital signature; and  
at least one extension having rules to control installation of an update image.

62. A certificate according to Claim 61, wherein the certificate is signed with a private key of a certificate authority.

63. A certificate according to Claim 61, wherein the certificate is a certificate in a hierarchy of a plurality of certificates.

64. A certificate according to Claim 63, wherein the certificate is signed with a private key of a next-higher authority associated with a next-higher certificate in the hierarch of certificates.

65. A certificate according to Claim 61, wherein the rules comprise at least one of rules information associated with a manufacturer of the device, rules information associated with a brand of the device, rules information associated with a software version of

the device, rules information associated with a license authorization of the device or rules associated with the individual device.

66. A certificate according to Claim 61, wherein the rules comprise rules defining devices for which application of the update image is authorized.

67. A certificate according to Claim 66, wherein the rules defining devices comprise rules specifying at least one of authorized device serial numbers, authorized firmware versions, authorized device manufacturers and authorized users associated with a device.

68. A method according to Claim 61, wherein the rules comprise rules defining how data from the update image is utilized to update the programmable memory.

69. A method of providing a plurality of devices having differing functionality, the method comprising:  
providing a plurality of generic processing  
devices having hardware suitable to perform at least a  
5 portion of the differing functionality of the plurality  
of devices, wherein the generic processing devices also  
have a programmable memory;

10 distributing to the plurality of generic  
processing devices updates to the programmable memory  
so as to define the functionality of the generic  
processing devices so as to provide the plurality of  
devices having differing functionality, wherein the

15

updates have at least one associated certificate, the certificate having update application rules in at least one extension of the certificate; and

selectively updating the programmable memories of the generic processing devices based on the distributed updates and the rules specified in the at least one extension of the certificate.

70. A method according to Claim 69, wherein the step of distributing to the plurality of generic processing devices comprises the step of transmitting updates of the programmable memory over the Internet.

71. A method according to Claim 70, wherein the plurality of generic processing devices comprise automobiles and wherein the updates of the programmable memory to control options provided for the automobiles.

72. A method of providing a plurality having differing functionality, the method comprising:

distributing through a non-secure distribution channel a plurality of devices; and

5       controlling the functionality of individual ones of the plurality of devices by a secure update of the individual ones of the plurality of devices, wherein the update is controlled by a trusted update authority within the distribution channel.

73. A method according to Claim 72, wherein the secure update comprises transmitting update information over the Internet.



METHODS, SYSTEMS AND COMPUTER PROGRAM PRODUCTS FOR  
RULE BASED FIRMWARE UPDATES UTILIZING CERTIFICATE  
EXTENSIONS

Abstract of the Disclosure

Methods, systems, computer program products and business methods are provided which provide or utilize updates of firmware (i.e. data stored in a programmable memory device of a processing system) based on rules provided as extensions to certificates associated with an update. Such updates may be provided by obtaining an update image corresponding to the update of the programmable memory and obtaining a certificate associated with the update image, the certificate having update application rules in at least one extension of the certificate. The certificate may be provided as part of the update image. The update application rules are extracted from the extension of the certificate and the programmable memory selectively updated based on the update image and the update application rules extracted from the obtained certificate. Certificates for use in such firmware updates are also provided.



The diagram illustrates a memory system architecture. At the top, a horizontal bus line connects to three components: Programmable Memory 14, Read Only Memory 16, and Memory Controller 12. Below these, a D-type flip-flop 18 is shown with inputs S, R, and a clock input (triangle symbol), and outputs Q and  $\overline{Q}$ . The flip-flop is connected to the Memory Controller 12 and the Processor 10. The Processor 10 has an 'Access Latch Reset' input and a 'Reset' input. A 'Power On Reset' signal is connected to the 'Reset' input of the Processor 10 and the 'R' input of the flip-flop 18. The 'Q' output of the flip-flop 18 is connected to the 'Access Latch Reset' input of the Processor 10. The 'Memory Controller 12' is connected to the 'Access Latch Reset' input of the Processor 10. The 'Reset' input of the Processor 10 is also connected to the 'R' input of the flip-flop 18.

## Figure 1

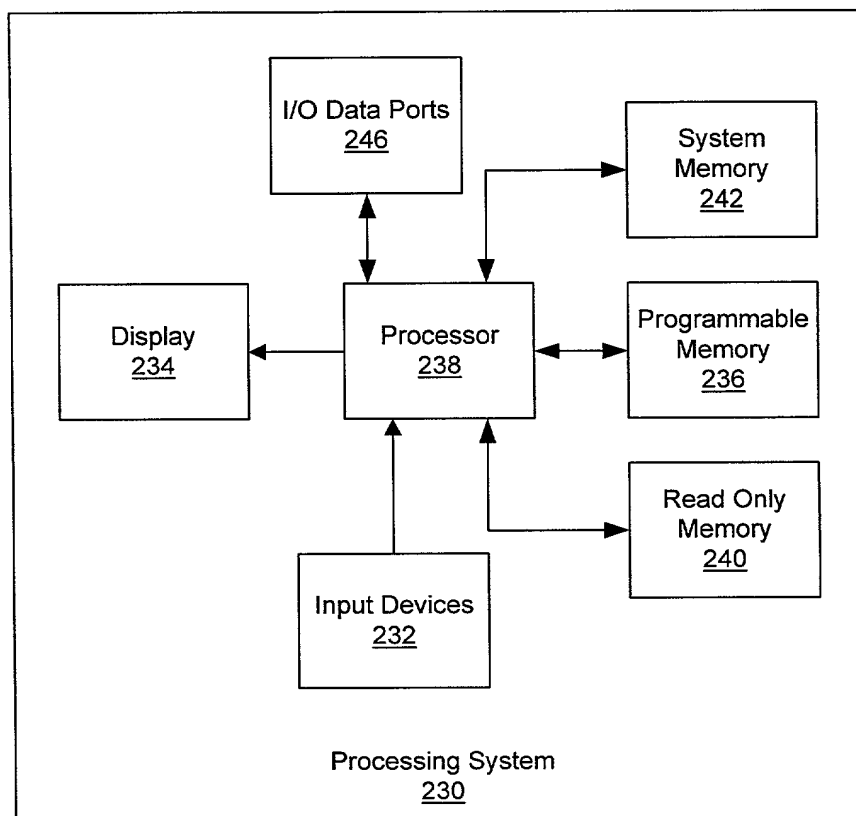


Figure 2

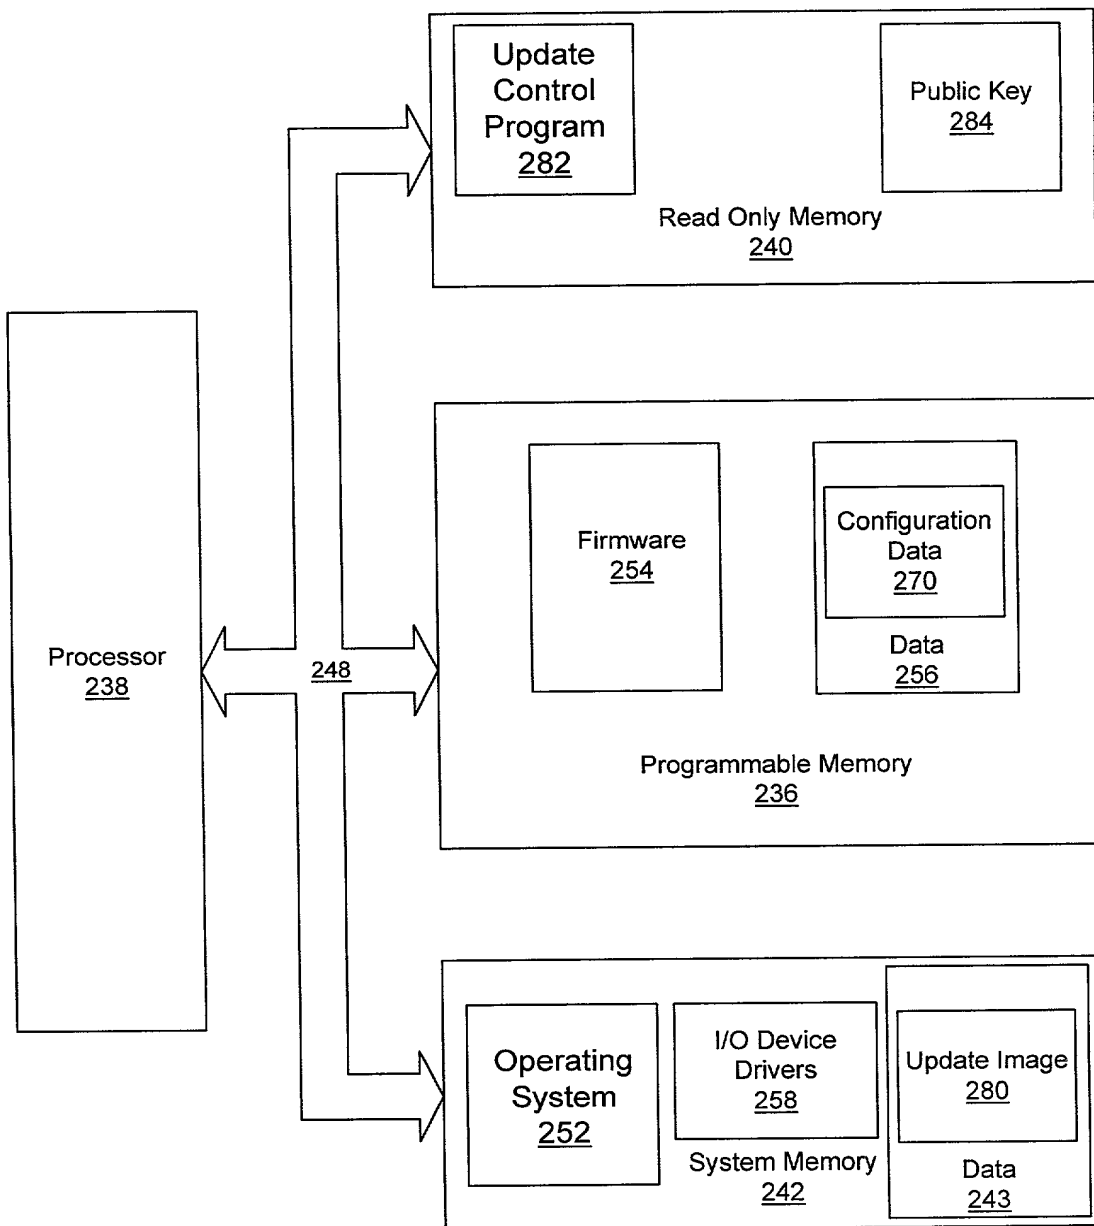


Figure 3

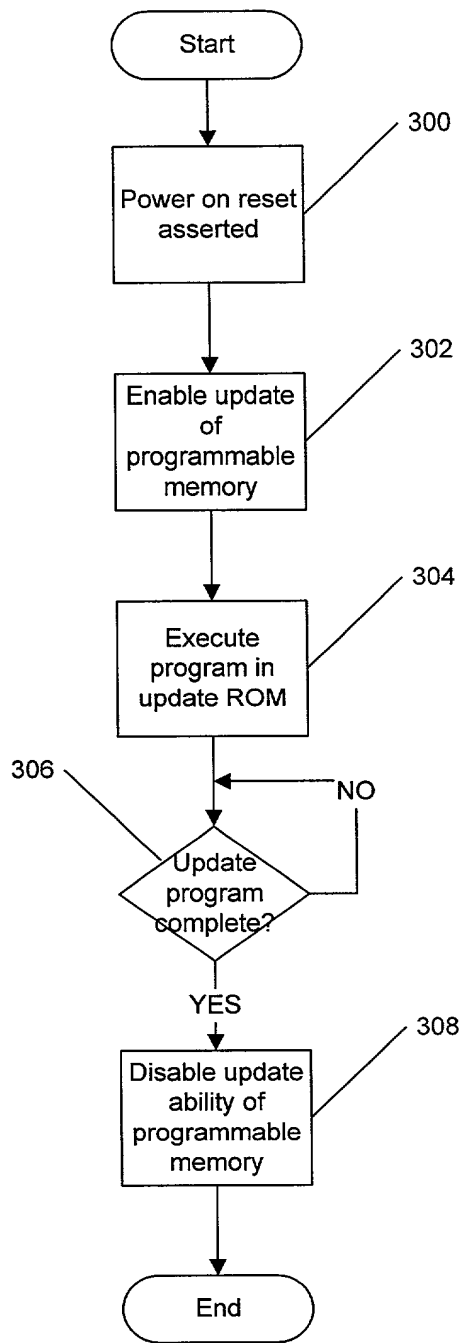


Figure 4A



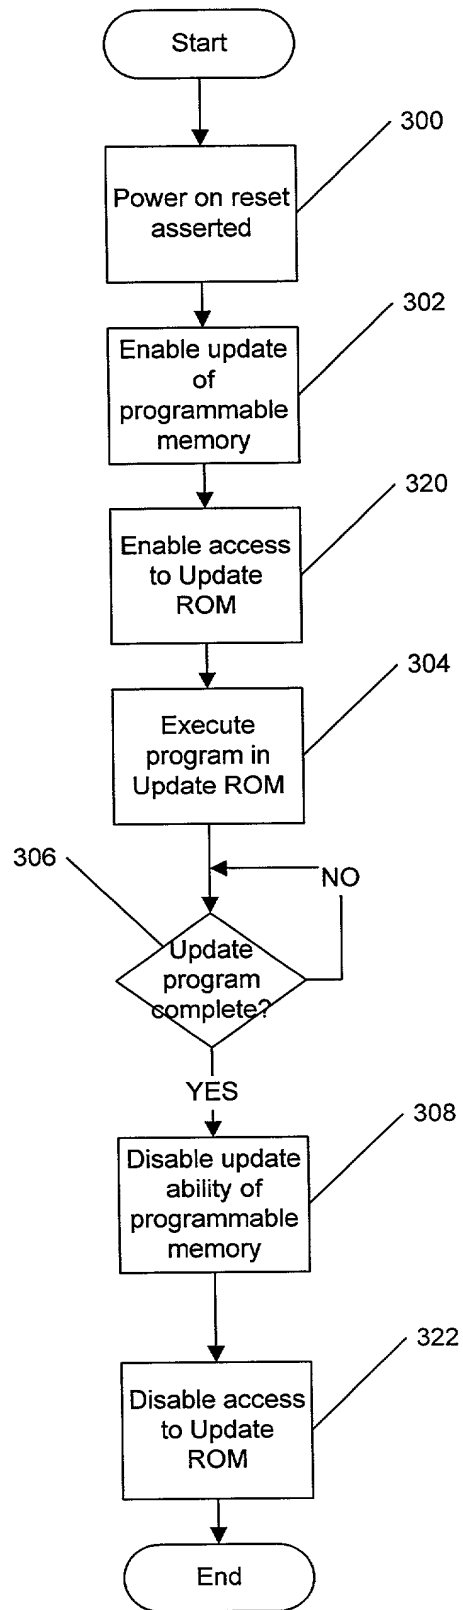


Figure 4B

Figure 5

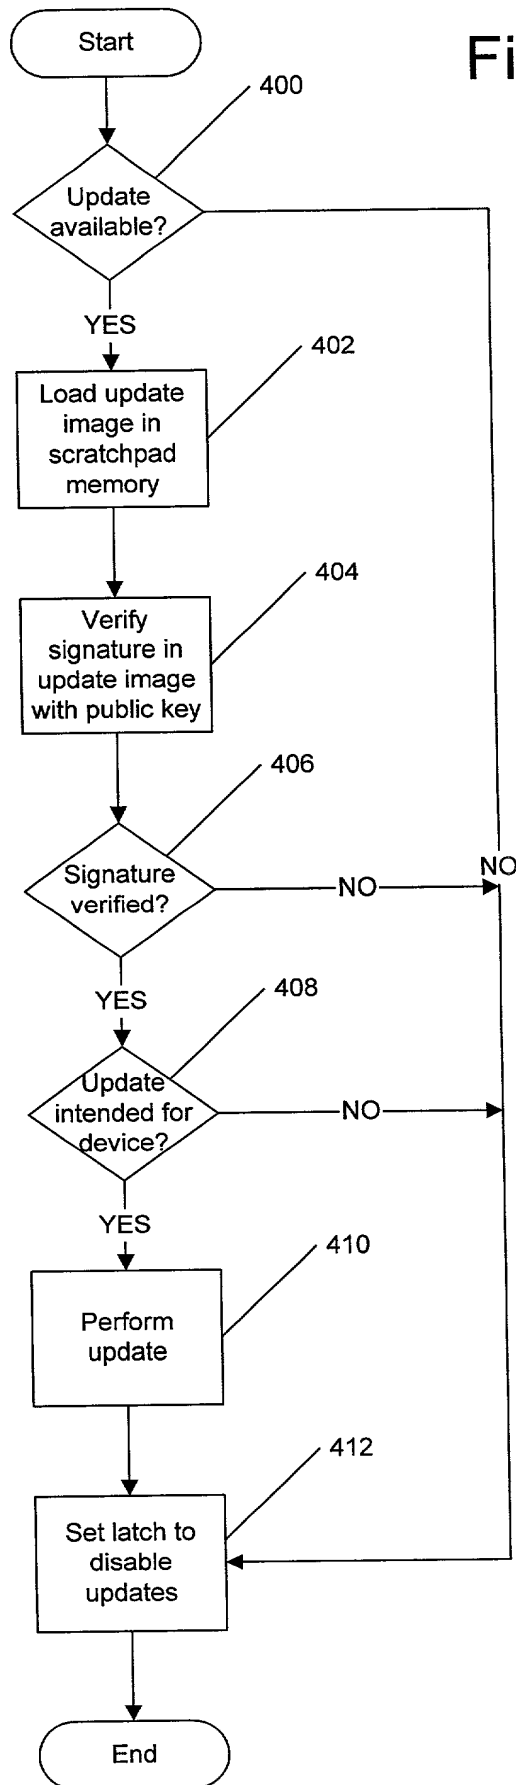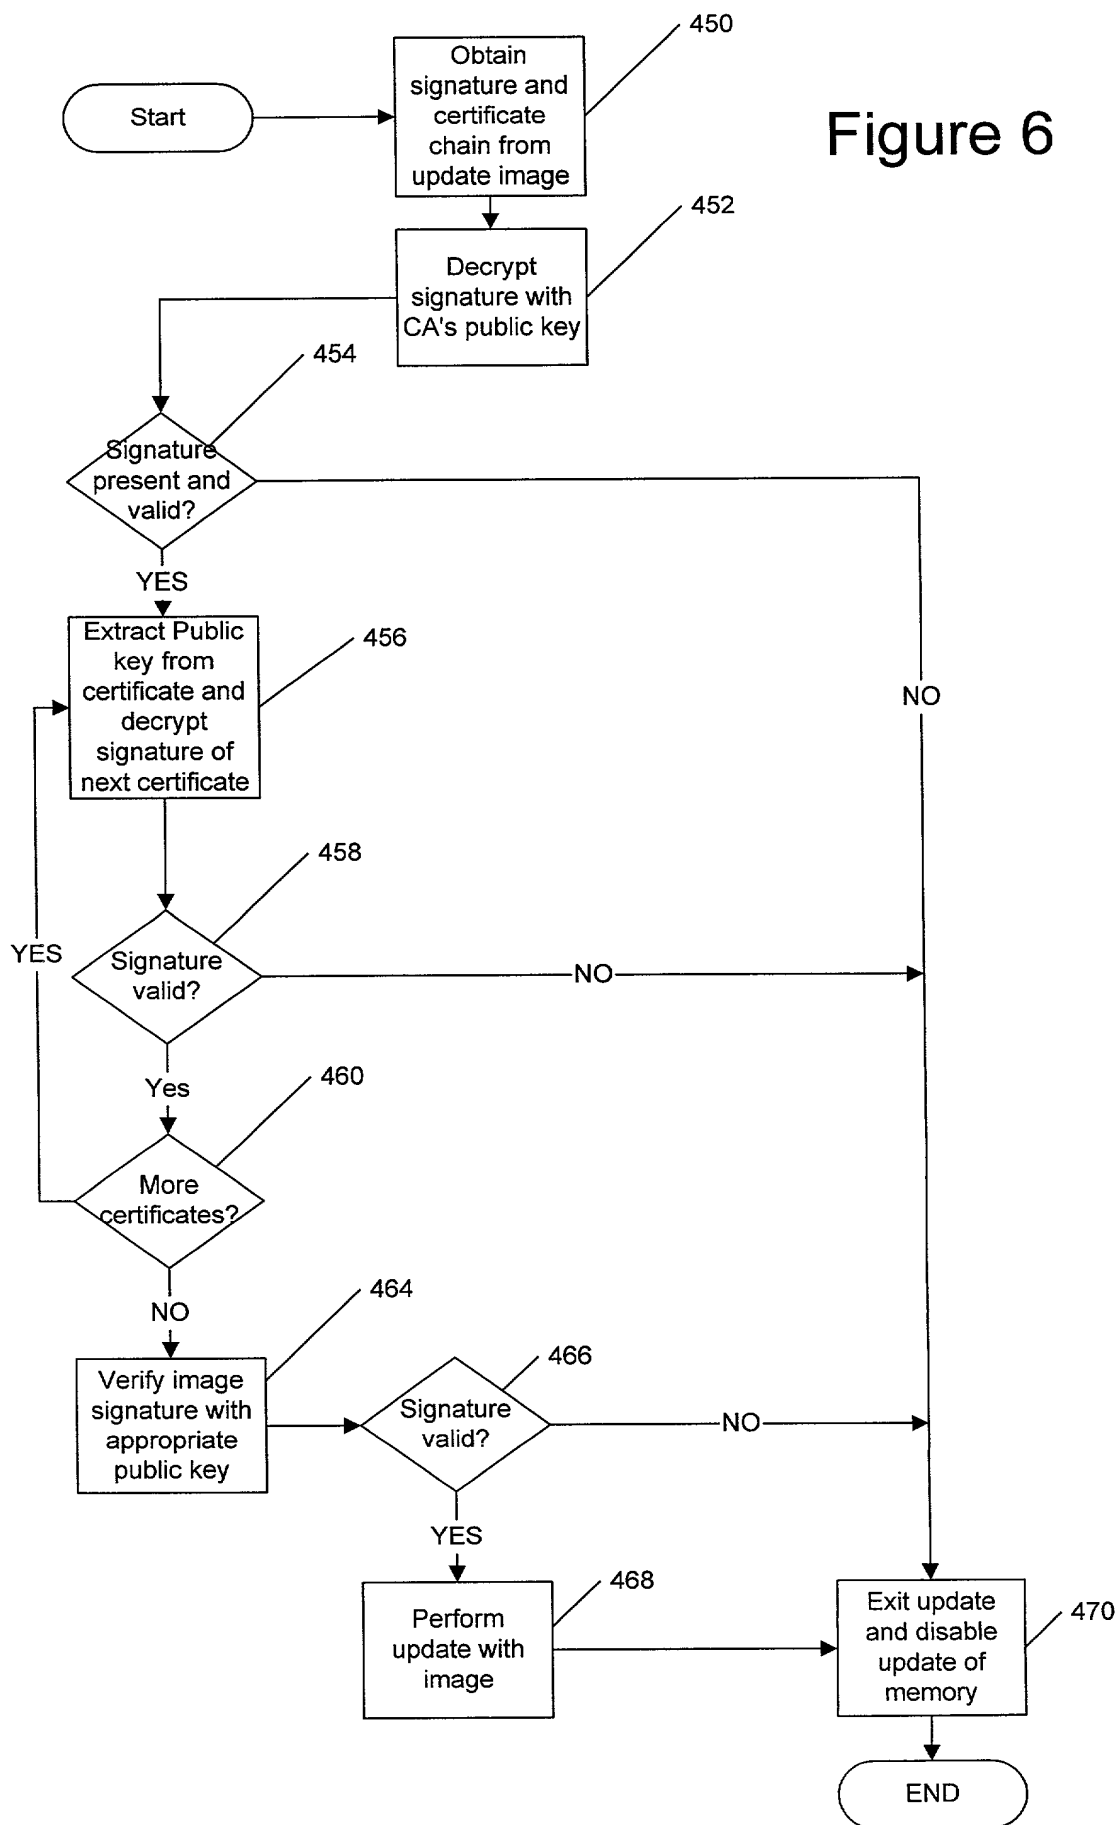

## Figure 6



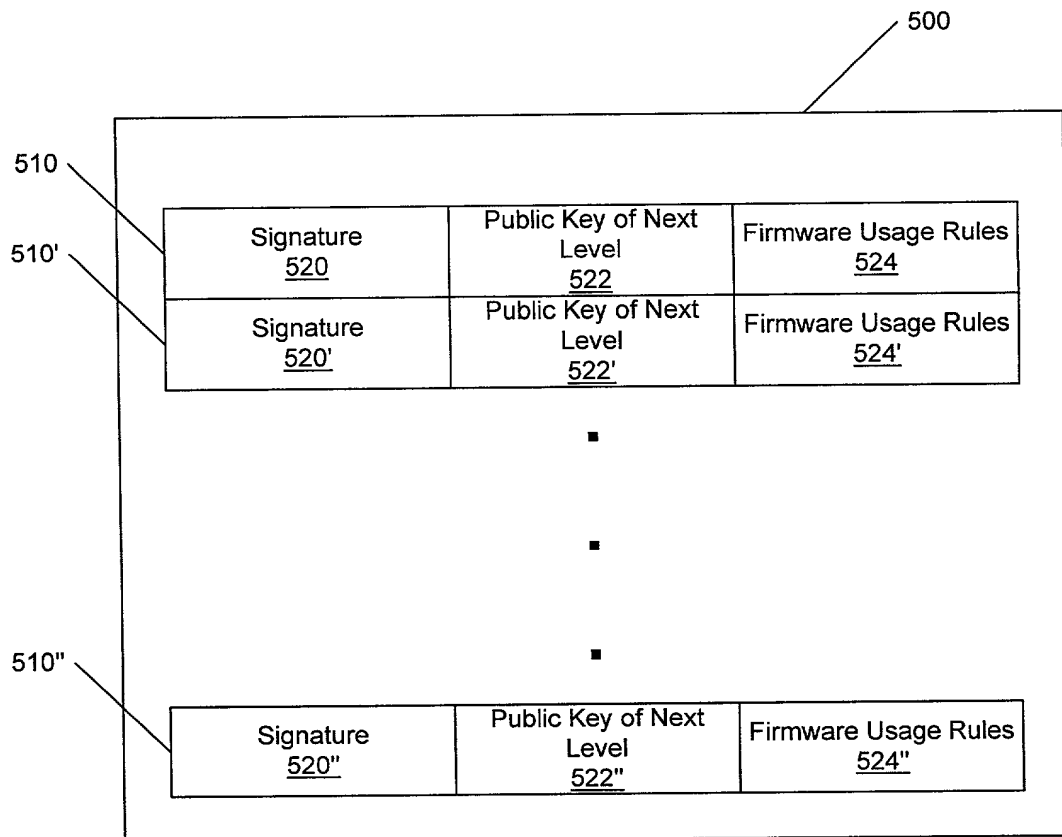


Figure 7



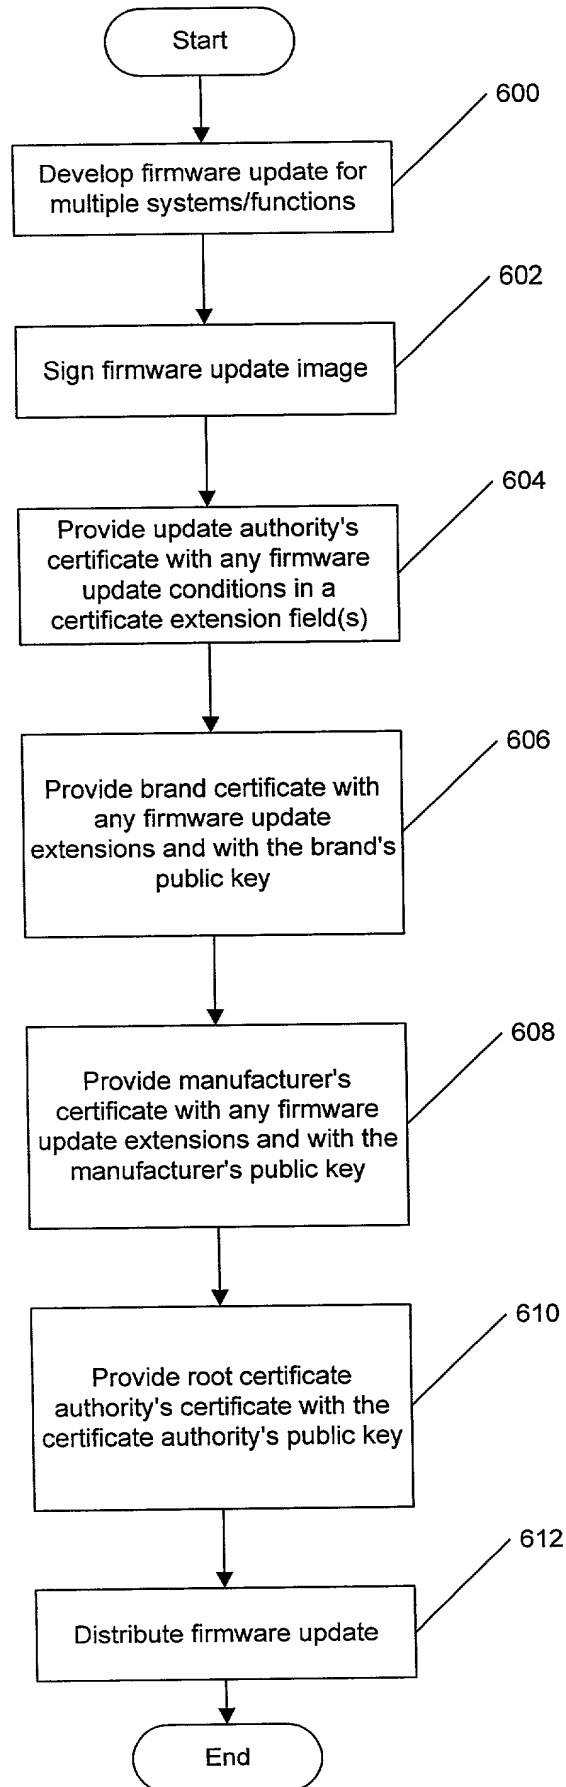


Figure 8

### Figure 9

### Figure 10

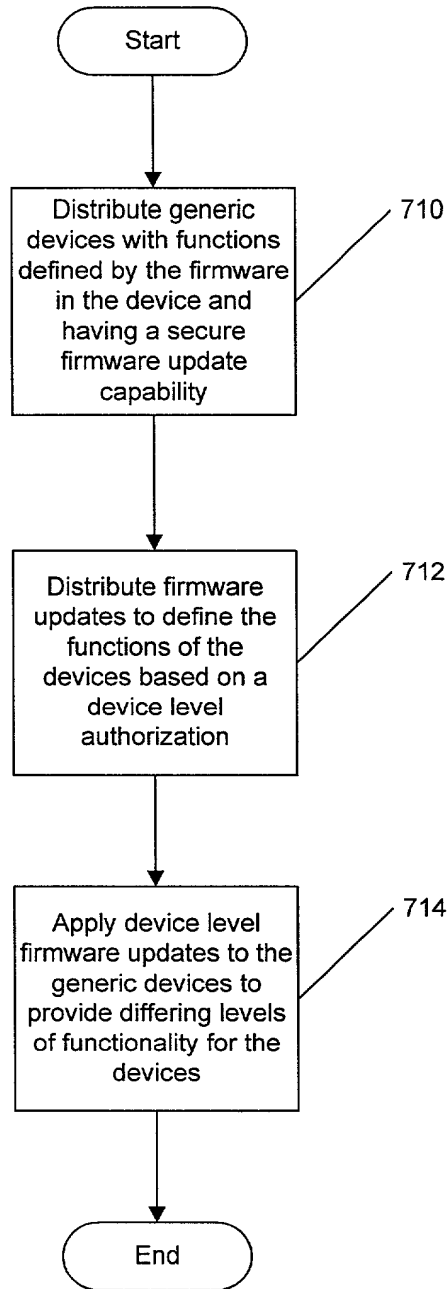


Figure 11

# DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Attorney Docket No. 5577-204

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

## **METHODS, SYSTEMS AND COMPUTER PROGRAM PRODUCTS FOR RULE BASED FIRMWARE UPDATES UTILIZING CERTIFICATE EXTENSIONS AND CERTIFICATES FOR USE THEREIN,**

the specification of which

☒ is attached hereto

OR

☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate, or of any PCT International application having a filing date before that of the application on which priority is claimed.

None			<input type="checkbox"/> Yes <input type="checkbox"/> No
Number	Country	MM/DD/YYYY Filed	Priority Claimed
			<input type="checkbox"/> Yes <input type="checkbox"/> No
Number	Country	MM/DD/YYYY Filed	Priority Claimed
			<input type="checkbox"/> Yes <input type="checkbox"/> No
Number	Country	MM/DD/YYYY Filed	Priority Claimed

## ENGLISH LANGUAGE DECLARATION CONTINUED

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

None	
Application Number(s)	Filing Date (MM/DD/YYYY)
Application Number(s)	Filing Date (MM/DD/YYYY)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application (37 C.F.R. § 1.63(d)).

None		
Appln. Serial No.	Filing Date	Status Patented/Pending/Abandoned
Appln. Serial No.	Filing Date	Status Patented/Pending/Abandoned
Appln. Serial No.	Filing Date	Status Patented/Pending/Abandoned

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

ENGLISH LANGUAGE DECLARATION CONTINUED

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following registered attorney(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

A. Bruce Clay  
Registration No. 32,121

Edward H. Duffield  
Registration No. 25,970

Gregory M. Doudnikoff  
Registration No. 32,847

Jerry W. Herndon  
Registration No. 27,901

Jeanine S. Ray-Yarletts  
Registration No. 39,808

Gerald R. Woods  
Registration No. 24,144

Timothy J. O'Sullivan  
Registration No. 35,632

Mitchell S. Bigel  
Registration No. 29,614

Send correspondence to:

USPTO Customer No. 20792  
Timothy J. O'Sullivan  
Myers Bigel Sibley & Sajovec  
Post Office Drawer 37428  
Raleigh, North Carolina 27627


Direct telephone calls to:

Timothy J. O'Sullivan  
(919) 854-1400

Facsimile:

(919) 854-1401

Full name of first inventor: **John R. Hind**

Inventor's  
Signature:  Date: 7/11/00

Residence: Raleigh, North Carolina

Citizenship: United States of America

Post Office Address: 5005 Barton's Enclave Lane  
Raleigh, North Carolina 27613

ENGLISH LANGUAGE DECLARATION CONTINUED

Full name of second inventor: **Marcia Lambert Peters**

Inventor's

Signature: Marcia Lambert Peters Date: 7-11-2000

Residence: Durham, North Carolina

Citizenship: United States of America

Post Office Address: 4610 S. Miami Blvd.  
Durham, North Carolina 27703

003120"684T060